

Equipped with:

- Polyurethane blue hoses
- Nickel-plated brass connections
- Swivelling joint 90° nickel-plated brass
- Viton seals



**FX-400**

| Article      | Hose length  | Ø hose | Inlet-outlet         |
|--------------|--------------|--------|----------------------|
| 070-2201-300 | Without hose | -      | F3/8"G - M3/8"G      |
| 070-2201-400 | Without hose | -      | M1/2"G - M1/2"G      |
| 070-2201-215 | 15 m         | 8x12   | F3/8"G - M1/4"G gir. |
| 070-2201-220 | 20 m         | 8x12   | F3/8"G - M1/4"G gir. |
| 070-2201-310 | 10 m         | 10x14  | F3/8"G - M3/8"G      |
| 070-2201-315 | 15 m         | 10x14  | F3/8"G - M3/8"G      |
| 070-2201-410 | 10 m         | 13x19  | M1/2"G - M1/2"G      |




**FX-460**

|              |              |       |                 |
|--------------|--------------|-------|-----------------|
| 070-2301-400 | Without hose | -     | M1/2"G - M1/2"G |
| 070-2301-320 | 20 m         | 10X14 | M1/2"G - M3/8"G |
| 070-2301-415 | 15 m         | 13X19 | M1/2"G - M1/2"G |
| 070-2301-418 | 18 m         | 13X19 | M1/2"G - M1/2"G |






**FX-550**
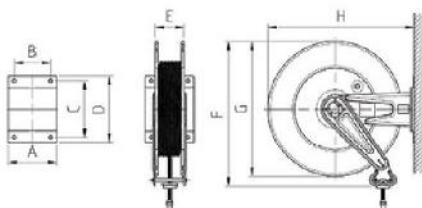
|              |              |       |                 |
|--------------|--------------|-------|-----------------|
| 070-2401-400 | Without hose | -     | M1/2"G - M1/2"G |
| 070-2401-420 | 20 m         | 13X19 | M1/2"G - M1/2"G |
| 070-2401-425 | 25 m         | 13X19 | M1/2"G - M1/2"G |



## OVERALL DIMENSIONS FIXED

| Mod.   | A   | B   | C   | D   | E   | F   | G   | H   |  |  |  |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|
| FX-400 | 158 | 120 | 168 | 192 | 95  | 450 | 400 | 435 | 12,50<19,50   | 0,046   | 1   |
| FX-460 | 158 | 120 | 168 | 192 | 95  | 480 | 460 | 500 | 16,50<23,00   | 0,060   | 1   |
| FX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<28,00   | 0,085   | 1   |

# STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 SWIVELLING FOR AIR-WATER 20 bar



Equipped with:

- Polyurethane blue hoses
- Nickel-plated brass connections
- Swivelling joint 90° nickel-plated brass
- Viton seals

| Article      | Hose length  | Ø hose | Inlet-outlet         |
|--------------|--------------|--------|----------------------|
| 071-2201-300 | Without hose | -      | F3/8"G - M3/8"G      |
| 071-2201-400 | Without hose | -      | M1/2"G - M1/2"G      |
| 071-2201-215 | 15 m         | 8x12   | F3/8"G - M1/4"G gir. |
| 071-2201-220 | 20 m         | 8x12   | F3/8"G - M1/4"G gir. |
| 071-2201-310 | 10 m         | 10x14  | F3/8"G - M3/8"G      |
| 071-2201-315 | 15 m         | 10x14  | F3/8"G - M3/8"G      |
| 071-2201-410 | 10 m         | 13x19  | M1/2"G - M1/2"G      |

**SX-400**



|              |              |       |                 |
|--------------|--------------|-------|-----------------|
| 071-2301-400 | Without hose | -     | M1/2"G - M1/2"G |
| 071-2301-320 | 20 m         | 10X14 | M1/2"G - M3/8"G |
| 071-2301-415 | 15 m         | 13X19 | M1/2"G - M1/2"G |
| 071-2301-418 | 18 m         | 13X19 | M1/2"G - M1/2"G |

**SX-460**




|              |              |       |                 |
|--------------|--------------|-------|-----------------|
| 071-2401-400 | Without hose | -     | M1/2"G - M1/2"G |
| 071-2401-420 | 20 m         | 13X19 | M1/2"G - M1/2"G |
| 071-2401-425 | 25 m         | 13X19 | M1/2"G - M1/2"G |

**SX-550**



## OVERALL DIMENSIONS SWIVELLING

| Mod.   | A   | B   | C   | D   | E   | F   | G   | H   |             |       |   |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|-------------|-------|---|
| SX-400 | 150 | 120 | 168 | 196 | 95  | 450 | 400 | 510 | 13,50<20,50 | 0,046 | 1 |
| SX-460 | 150 | 120 | 168 | 196 | 95  | 480 | 460 | 575 | 17,50<24,00 | 0,060 | 1 |
| SX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00<29,00 | 0,085 | 1 |

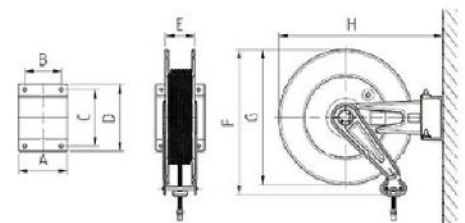

## STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 FIXED FOR AIR-WATER 20 bar

Equipped with:

- Synthetic black rubber hoses R6
- Galvanized connections
- Swivelling joint 90° nickel-plated brass
- Viton seals



**FX-400**

| Article      | Hose length  | Ø hose | Inlet-outlet      |
|--------------|--------------|--------|-------------------|
| 070-2201-300 | Without hose | -      | F3/8" G - M3/8" G |
| 070-2201-400 | Without hose | -      | M1/2" G - M1/2" G |
| 070-2202-212 | 12 m         | 5/16"  | F3/8" G - M1/4" G |
| 070-2202-218 | 18 m         | 5/16"  | F3/8" G - M1/4" G |
| 070-2202-310 | 10 m         | 3/8"   | F3/8" G - M3/8" G |
| 070-2202-318 | 18 m         | 3/8"   | F3/8" G - M3/8" G |
| 070-2202-410 | 10 m         | 1/2"   | M1/2" G - M1/2" G |

**FX-460**

|              |              |      |                   |
|--------------|--------------|------|-------------------|
| 070-2301-400 | Without hose | -    | M1/2" G - M1/2" G |
| 070-2302-320 | 20 m         | 3/8" | M1/2" G - M3/8" G |
| 070-2302-415 | 15 m         | 1/2" | M1/2" G - M1/2" G |
| 070-2302-418 | 18 m         | 1/2" | M1/2" G - M1/2" G |

**FX-550**

|              |              |      |                   |
|--------------|--------------|------|-------------------|
| 070-2401-400 | Without hose | -    | M1/2" G - M1/2" G |
| 070-2402-420 | 20 m         | 1/2" | M1/2" G - M1/2" G |
| 070-2402-425 | 25 m         | 1/2" | M1/2" G - M1/2" G |




**FX-555**


|              |              |      |                   |
|--------------|--------------|------|-------------------|
| 070-2502-400 | Without hose | -    | M1/2" G - M1/2" G |
| 070-2502-600 | Without hose | -    | F1" G - M1" G     |
| 070-2502-430 | 30 m         | 1/2" | M1/2" G - M1/2" G |
| 070-2502-515 | 15 m         | 3/4" | F3/4" G - M3/4" G |
| 070-2502-520 | 20 m         | 3/4" | F3/4" G - M3/4" G |
| 070-2502-615 | 15 m         | 1"   | F1" G - M1" G     |

**FX-560**

|              |              |      |                   |
|--------------|--------------|------|-------------------|
| 070-2602-600 | Without hose | -    | F1" G - M1" G     |
| 070-2602-530 | 30 m         | 3/4" | F3/4" G - M3/4" G |
| 070-2602-540 | 40 m         | 3/4" | F3/4" G - M3/4" G |
| 070-2602-620 | 20 m         | 1"   | F1" G - M1" G     |
| 070-2602-630 | 30 m         | 1"   | F1" G - M1" G     |

### OVERALL DIMENSIONS FIXED

| Mod.   | A   | B   | C   | D   | E   | F   | G   | H   |  |  |  |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|
| FX-400 | 158 | 120 | 168 | 192 | 95  | 450 | 400 | 435 | 12,50<19,50   | 0,046   | 1   |
| FX-460 | 158 | 120 | 168 | 192 | 95  | 480 | 460 | 500 | 16,50<23,00   | 0,060   | 1   |
| FX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<45,00   | 0,085   | 1   |
| FX-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 600 | 26,00<53,00   | 0,100   | 1   |
| FX-560 | 440 | 390 | 225 | 270 | 360 | 590 | 550 | 600 | 33,00<83,00   | 0,180   | 1   |

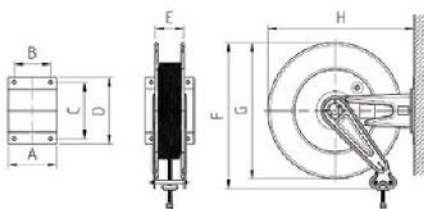

# STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 SWIVELLING FOR AIR-WATER 20 bar



Equipped with:

- Synthetic black rubber hoses R6
- Galvanized connections
- Swivelling joint 90° nickel-plated brass
- Viton seals

| Article      | Hose length  | Ø hose | Inlet-outlet    |
|--------------|--------------|--------|-----------------|
| 071-2201-300 | Without hose | -      | F3/8"G - M3/8"G |
| 071-2201-400 | Without hose | -      | M1/2"G - M1/2"G |
| 071-2202-212 | 12 m         | 5/16"  | F3/8"G - M1/4"G |
| 071-2202-218 | 18 m         | 5/16"  | F3/8"G - M1/4"G |
| 071-2202-310 | 10 m         | 3/8"   | F3/8"G - M3/8"G |
| 071-2202-318 | 18 m         | 3/8"   | F3/8"G - M3/8"G |
| 071-2202-410 | 10 m         | 1/2"   | M1/2"G - M1/2"G |
| 071-2301-400 | Without hose | -      | M1/2"G - M1/2"G |
| 071-2302-320 | 20 m         | 3/8"   | M1/2"G - M3/8"G |
| 071-2302-415 | 15 m         | 1/2"   | M1/2"G - M1/2"G |
| 071-2302-418 | 18 m         | 1/2"   | M1/2"G - M1/2"G |
| 071-2401-400 | Without hose | -      | M1/2"G - M1/2"G |
| 071-2402-420 | 20 m         | 1/2"   | M1/2"G - M1/2"G |
| 071-2402-425 | 25 m         | 1/2"   | M1/2"G - M1/2"G |
| 071-2502-400 | Without hose | -      | M1/2"G - M1/2"G |
| 071-2502-600 | Without hose | -      | F1"G - M1"G     |
| 071-2502-430 | 30 m         | 1/2"   | M1/2"G - M1/2"G |
| 071-2502-515 | 15 m         | 3/4"   | F3/4"G - M3/4"G |
| 071-2502-520 | 20 m         | 3/4"   | F3/4"G - M3/4"G |
| 071-2502-615 | 15 m         | 1"     | F1"G - M1"G     |

**SX-400**



**SX-460**



**SX-550**




**SX-555**



## OVERALL DIMENSIONS SWIVELLING

| Mod.   | A   | B   | C   | D   | E   | F   | G   | H   | Kg          | m <sup>3</sup> | Nº |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|-------------|----------------|----|
| SX-400 | 150 | 120 | 168 | 196 | 95  | 450 | 400 | 510 | 13,50<20,50 | 0,046          | 1  |
| SX-460 | 150 | 120 | 168 | 196 | 95  | 480 | 460 | 575 | 17,50<24,00 | 0,060          | 1  |
| SX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00<45,00 | 0,085          | 1  |
| SX-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 680 | 27,00<54,00 | 0,100          | 1  |

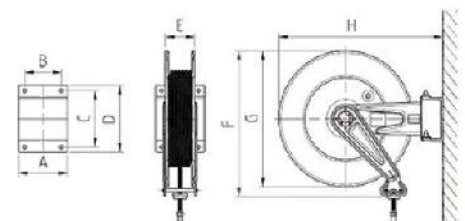

# STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 FIXED FOR WATER 150 °C 200 bar

Equipped with:

- Synthetic rubber hoses no trace blue 1SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals



**FX-400**

| Article      | Hose length  | Ø hose | Inlet-outlet    |
|--------------|--------------|--------|-----------------|
| 070-2205-300 | Without hose | -      | M3/8"G - M3/8"G |
| 070-2205-400 | Without hose | -      | M1/2"G - M1/2"G |
| 070-2204-210 | 10 m         | 5/16"  | M3/8"G - F3/8"G |
| 070-2204-215 | 15 m         | 5/16"  | M3/8"G - F3/8"G |
| 070-2204-310 | 10 m         | 3/8"   | M3/8"G - F3/8"G |
| 070-2204-410 | 10 m         | 1/2"   | M1/2"G - F1/2"G |



**FX-460**

|              |              |       |                 |
|--------------|--------------|-------|-----------------|
| 070-2305-300 | Without hose | -     | M3/8"G - M3/8"G |
| 070-2305-400 | Without hose | -     | M1/2"G - M1/2"G |
| 070-2304-220 | 20 m         | 5/16" | M3/8"G - F3/8"G |
| 070-2304-315 | 15 m         | 3/8"  | M3/8"G - F3/8"G |
| 070-2304-318 | 18 m         | 3/8"  | M3/8"G - F3/8"G |
| 070-2304-415 | 15 m         | 1/2"  | M1/2"G - F1/2"G |



**FX-550**

|              |              |      |                 |
|--------------|--------------|------|-----------------|
| 070-2405-300 | Without hose | -    | M3/8"G - M3/8"G |
| 070-2405-400 | Without hose | -    | M1/2"G - M1/2"G |
| 070-2404-320 | 20 m         | 3/8" | M3/8"G - F3/8"G |
| 070-2404-325 | 25 m         | 3/8" | M3/8"G - F3/8"G |
| 070-2404-420 | 20 m         | 1/2" | M1/2"G - F1/2"G |



**FX-555**




|              |              |      |                 |
|--------------|--------------|------|-----------------|
| 070-2505-300 | Without hose | -    | M3/8"G - M3/8"G |
| 070-2505-400 | Without hose | -    | M1/2"G - M1/2"G |
| 070-2504-330 | 30 m         | 3/8" | M3/8"G - F3/8"G |
| 070-2504-425 | 25 m         | 1/2" | M1/2"G - F1/2"G |
| 070-2504-430 | 30 m         | 1/2" | M1/2"G - F1/2"G |




**FX-560**

|              |              |      |                 |
|--------------|--------------|------|-----------------|
| 070-2605-400 | Without hose | -    | M1/2"G - M1/2"G |
| 070-2604-340 | 40 m         | 3/8" | M1/2"G - F3/8"G |
| 070-2604-440 | 40 m         | 1/2" | M1/2"G - F1/2"G |

## OVERALL DIMENSIONS FIXED

| Mod.   | A   | B   | C   | D   | E   | F   | G   | H   |  |  |  |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|
| FX-400 | 158 | 120 | 168 | 192 | 95  | 450 | 400 | 435 | 12,50<19,50   | 0,046   | 1   |
| FX-460 | 158 | 120 | 168 | 192 | 95  | 480 | 460 | 500 | 16,50<23,00   | 0,060   | 1   |
| FX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<45,00   | 0,085   | 1   |
| FX-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 600 | 26,00<53,00   | 0,100   | 1   |
| FX-560 | 440 | 390 | 225 | 270 | 360 | 590 | 550 | 600 | 33,00<83,00   | 0,180   | 1   |

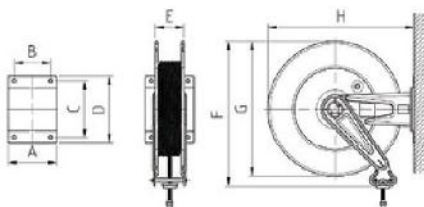

# STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 SWIVELLING FOR WATER 150 °C 200 bar



Equipped with:

- Synthetic rubber hoses no trace blue 1SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals

| Article      | Hose length  | Ø hose | Inlet-outlet    |
|--------------|--------------|--------|-----------------|
| 071-2205-300 | Without hose | -      | M3/8"G - M3/8"G |
| 071-2205-400 | Without hose | -      | M1/2"G - M1/2"G |
| 071-2204-210 | 10 m         | 5/16"  | M3/8"G - F3/8"G |
| 071-2204-215 | 15 m         | 5/16"  | M3/8"G - F3/8"G |
| 071-2204-310 | 10 m         | 3/8"   | M3/8"G - F3/8"G |
| 071-2204-410 | 10 m         | 1/2"   | M1/2"G - F1/2"G |
| 071-2305-300 | Without hose | -      | M3/8"G - M3/8"G |
| 071-2305-400 | Without hose | -      | M1/2"G - M1/2"G |
| 071-2304-220 | 20 m         | 5/16"  | M3/8"G - F3/8"G |
| 071-2304-315 | 15 m         | 3/8"   | M3/8"G - F3/8"G |
| 071-2304-318 | 18 m         | 3/8"   | M3/8"G - F3/8"G |
| 071-2304-415 | 15 m         | 1/2"   | M1/2"G - F1/2"G |
| 071-2405-300 | Without hose | -      | M3/8"G - M3/8"G |
| 071-2405-400 | Without hose | -      | M1/2"G - M1/2"G |
| 071-2404-320 | 20 m         | 3/8"   | M3/8"G - F3/8"G |
| 071-2404-325 | 25 m         | 3/8"   | M3/8"G - F3/8"G |
| 071-2404-420 | 20 m         | 1/2"   | M1/2"G - F1/2"G |
| 071-2505-300 | Without hose | -      | M3/8"G - M3/8"G |
| 071-2505-400 | Without hose | -      | M1/2"G - M1/2"G |
| 071-2504-330 | 30 m         | 3/8"   | M3/8"G - F3/8"G |
| 071-2504-425 | 25 m         | 1/2"   | M1/2"G - F1/2"G |
| 071-2504-430 | 30 m         | 1/2"   | M1/2"G - F1/2"G |

**SX-400**



**SX-460**



**SX-550**




**SX-555**



## OVERALL DIMENSIONS SWIVELLING

| Mod.   | A   | B   | C   | D   | E   | F   | G   | H   |             |       |   |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|-------------|-------|---|
| SX-400 | 150 | 120 | 168 | 196 | 95  | 450 | 400 | 510 | 13,50<20,50 | 0,046 | 1 |
| SX-460 | 150 | 120 | 168 | 196 | 95  | 480 | 460 | 575 | 17,50<24,00 | 0,060 | 1 |
| SX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00<45,00 | 0,085 | 1 |
| SX-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 680 | 27,00<54,00 | 0,100 | 1 |

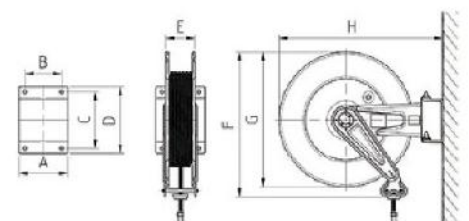

# STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 FIXED FOR WATER 150 °C 400 bar




Equipped with:


- Synthetic rubber hoses no trace blue 2SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals



| FX-400 | Article      | Hose length  | Ø hose | Inlet-outlet    |
|--------|--------------|--------------|--------|-----------------|
|        | 070-2205-300 | Without hose | -      | M3/8"G - M3/8"G |
|        | 070-2205-400 | Without hose | -      | M1/2"G - M1/2"G |
|        | 070-2205-210 | 10 m         | 5/16"  | M3/8"G - F3/8"G |
|        | 070-2205-215 | 15 m         | 5/16"  | M3/8"G - F3/8"G |
|        | 070-2205-310 | 10 m         | 3/8"   | M3/8"G - F3/8"G |
|        | 070-2205-410 | 10 m         | 1/2"   | M1/2"G - F1/2"G |
| FX-460 | 070-2305-300 | Without hose | -      | M3/8"G - M3/8"G |
|        | 070-2305-400 | Without hose | -      | M1/2"G - M1/2"G |
|        | 070-2305-220 | 20 m         | 5/16"  | M3/8"G - F3/8"G |
|        | 070-2305-315 | 15 m         | 3/8"   | M3/8"G - F3/8"G |
|        | 070-2305-318 | 18 m         | 3/8"   | M3/8"G - F3/8"G |
|        | 070-2305-415 | 15 m         | 1/2"   | M1/2"G - F1/2"G |
| FX-550 | 070-2405-300 | Without hose | -      | M3/8"G - M3/8"G |
|        | 070-2405-400 | Without hose | -      | M1/2"G - M1/2"G |
|        | 070-2405-320 | 20 m         | 3/8"   | M3/8"G - F3/8"G |
|        | 070-2405-325 | 25 m         | 3/8"   | M3/8"G - F3/8"G |
|        | 070-2405-420 | 20 m         | 1/2"   | M1/2"G - F1/2"G |
| FX-555 | 070-2505-300 | Without hose | -      | M3/8"G - M3/8"G |
|        | 070-2505-400 | Without hose | -      | M1/2"G - M1/2"G |
|        | 070-2505-330 | 30 m         | 3/8"   | M3/8"G - F3/8"G |
|        | 070-2505-425 | 25 m         | 1/2"   | M1/2"G - F1/2"G |
|        | 070-2505-430 | 30 m         | 1/2"   | M1/2"G - F1/2"G |
| FX-560 | 070-2605-400 | Without hose | -      | M1/2"G - M1/2"G |
|        | 070-2605-340 | 40 m         | 3/8"   | M1/2"G - F3/8"G |
|        | 070-2605-440 | 40 m         | 1/2"   | M1/2"G - F1/2"G |

## OVERALL DIMENSIONS FIXED

| Mod.   | A   | B   | C   | D   | E   | F   | G   | H   |  |  |  |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|
| FX-400 | 158 | 120 | 168 | 192 | 95  | 450 | 400 | 435 | 12,50<19,50   | 0,046   | 1   |
| FX-460 | 158 | 120 | 168 | 192 | 95  | 480 | 460 | 500 | 16,50<23,00   | 0,060   | 1   |
| FX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<45,00   | 0,085   | 1   |
| FX-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 600 | 26,00<53,00   | 0,100   | 1   |
| FX-560 | 440 | 390 | 225 | 270 | 360 | 590 | 550 | 600 | 33,00<83,00   | 0,180   | 1   |

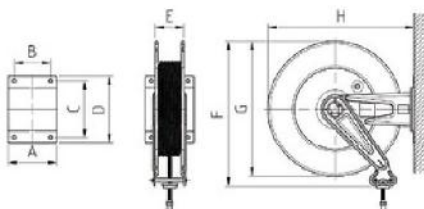

# STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 SWIVELLING FOR WATER 150 °C 400 bar



Equipped with:

- Synthetic rubber hoses no trace blue 2SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals

| Article      | Hose length  | Ø hose | Inlet-outlet    |
|--------------|--------------|--------|-----------------|
| 071-2205-300 | Without hose | -      | M3/8"G - M3/8"G |
| 071-2205-400 | Without hose | -      | M1/2"G - M1/2"G |
| 071-2205-210 | 10 m         | 5/16"  | M3/8"G - F3/8"G |
| 071-2205-215 | 15 m         | 5/16"  | M3/8"G - F3/8"G |
| 071-2205-310 | 10 m         | 3/8"   | M3/8"G - F3/8"G |
| 071-2205-410 | 10 m         | 1/2"   | M1/2"G - F1/2"G |
| 071-2305-300 | Without hose | -      | M3/8"G - M3/8"G |
| 071-2305-400 | Without hose | -      | M1/2"G - M1/2"G |
| 071-2305-220 | 20 m         | 5/16"  | M3/8"G - F3/8"G |
| 071-2305-315 | 15 m         | 3/8"   | M3/8"G - F3/8"G |
| 071-2305-318 | 18 m         | 3/8"   | M3/8"G - F3/8"G |
| 071-2305-415 | 15 m         | 1/2"   | M1/2"G - F1/2"G |
| 071-2405-300 | Without hose | -      | M3/8"G - M3/8"G |
| 071-2405-400 | Without hose | -      | M1/2"G - M1/2"G |
| 071-2405-320 | 20 m         | 3/8"   | M3/8"G - F3/8"G |
| 071-2405-325 | 25 m         | 3/8"   | M3/8"G - F3/8"G |
| 071-2405-420 | 20 m         | 1/2"   | M1/2"G - F1/2"G |
| 071-2505-300 | Without hose | -      | M3/8"G - M3/8"G |
| 071-2505-400 | Without hose | -      | M1/2"G - M1/2"G |
| 071-2505-330 | 30 m         | 3/8"   | M3/8"G - F3/8"G |
| 071-2505-425 | 25 m         | 1/2"   | M1/2"G - F1/2"G |
| 071-2505-430 | 30 m         | 1/2"   | M1/2"G - F1/2"G |

**SX-400**



**SX-460**



**SX-550**




**SX-555**



## OVERALL DIMENSIONS SWIVELLING

| Mod.   | A   | B   | C   | D   | E   | F   | G   | H   | Kg          | m³    | Nº |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|-------------|-------|----|
| SX-400 | 150 | 120 | 168 | 196 | 95  | 450 | 400 | 510 | 13,50<20,50 | 0,046 | 1  |
| SX-460 | 150 | 120 | 168 | 196 | 95  | 480 | 460 | 575 | 17,50<24,00 | 0,060 | 1  |
| SX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00<45,00 | 0,085 | 1  |
| SX-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 680 | 27,00<54,00 | 0,100 | 1  |

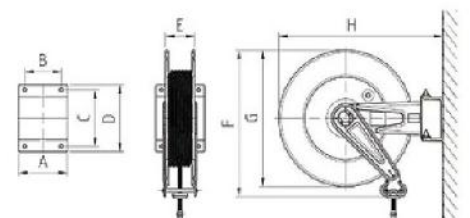



## STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 FIXED FOR DIESEL 10 bar

Equipped with:

- Antistatic black rubber hoses
- Galvanized connections
- Swivelling joint 90° galvanized
- Viton seals



**FX-550**

| Article      | Delivery | Hose length  | Ø hose | Inlet-outlet  |
|--------------|----------|--------------|--------|---------------|
| 070-2408-600 | 95 l/min | Without hose | -      | F1" G - M1" G |
| 070-2408-510 | 90 l/min | 10 m         | 3/4"   | F1" G - M1" G |
| 070-2408-515 | 85 l/min | 15m          | 3/4"   | F1" G - M1" G |
| 070-2408-610 | 95 l/min | 10m          | 1"     | F1" G - M1" G |




**FX-555**

|              |          |              |      |               |
|--------------|----------|--------------|------|---------------|
| 070-2508-600 | 95 l/min | Without hose | -    | F1" G - M1" G |
| 070-2508-520 | 83 l/min | 20 m         | 3/4" | F1" G - M1" G |
| 070-2508-615 | 90 l/min | 15 m         | 1"   | F1" G - M1" G |






**FX-560**
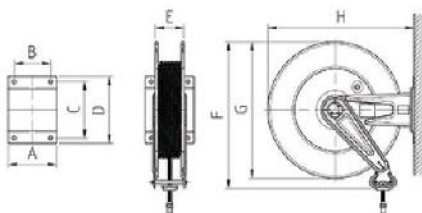
|              |          |              |      |               |
|--------------|----------|--------------|------|---------------|
| 070-2608-600 | 95 l/min | Without hose | -    | F1" G - M1" G |
| 070-2608-530 | 80 l/min | 30 m         | 3/4" | F1" G - M1" G |
| 070-2608-540 | 75 l/min | 40 m         | 3/4" | F1" G - M1" G |
| 070-2608-620 | 87 l/min | 20 m         | 1"   | F1" G - M1" G |
| 070-2608-630 | 85 l/min | 30 m         | 1"   | F1" G - M1" G |



### OVERALL DIMENSIONS FIXED

| Mod.   | A   | B   | C   | D   | E   | F   | G   | H   |  |  |  |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|
| FX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<45,00   | 0,085   | 1   |
| FX-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 600 | 26,00<53,00   | 0,100   | 1   |
| FX-560 | 440 | 390 | 225 | 270 | 360 | 590 | 550 | 600 | 33,00<83,00   | 0,180   | 1   |

# STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 SWIVELLING FOR DIESEL 10 bar



Equipped with:

- Antistatic black rubber hoses
- Galvanized connections
- Swivelling joint 90° galvanized
- Viton seals

| Article      | Delivery | Hose length  | Ø hose | Inlet-outlet  |
|--------------|----------|--------------|--------|---------------|
| 071-2408-600 | 95 l/min | Without hose | -      | F1" G - M1" G |
| 071-2408-510 | 90 l/min | 10 m         | 3/4"   | F1" G - M1" G |
| 071-2408-515 | 85 l/min | 15m          | 3/4"   | F1" G - M1" G |
| 071-2408-610 | 95 l/min | 10m          | 1"     | F1" G - M1" G |

**SX-550**




|              |          |              |      |               |
|--------------|----------|--------------|------|---------------|
| 071-2508-600 | 95 l/min | Without hose | -    | F1" G - M1" G |
| 071-2508-520 | 83 l/min | 20 m         | 3/4" | F1" G - M1" G |
| 071-2508-615 | 90 l/min | 15 m         | 1"   | F1" G - M1" G |

**SX-555**



## OVERALL DIMENSIONS SWIVELLING

| Mod.   | A   | B   | C   | D   | E   | F   | G   | H   | Kg          | m³    | No. |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|-------------|-------|-----|
| SX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00<45,00 | 0,085 | 1   |
| SX-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 680 | 27,00<54,00 | 0,100 | 1   |

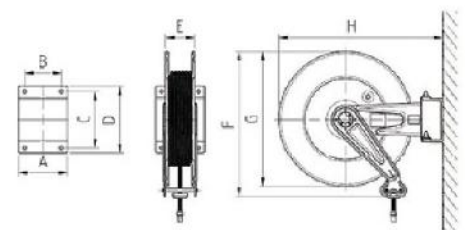

Equipped with:

- Antistatic black rubber hoses EPDM
- Stainless steel connections AISI 316
- Stainless steel swivelling joint 90° AISI 316
- Viton seals



**FX-400**

| Article      | Hose length  | Ø hose | Inlet-outlet    |
|--------------|--------------|--------|-----------------|
| 070-2209-400 | Without hose | -      | M1/2"G - M1/2"G |
| 070-2209-410 | 10 m         | 1/2"   | M1/2"G - M1/2"G |





**FX-460**

|              |              |      |                 |
|--------------|--------------|------|-----------------|
| 070-2309-400 | Without hose | -    | M1/2"G - M1/2"G |
| 070-2309-415 | 15 m         | 1/2" | M1/2"G - M1/2"G |






**FX-550**

|              |              |      |                 |
|--------------|--------------|------|-----------------|
| 070-2409-500 | Without hose | -    | F3/4"G - M3/4"G |
| 070-2409-510 | 10 m         | 3/4" | F3/4"G - M3/4"G |
| 070-2409-515 | 15 m         | 3/4" | F3/4"G - M3/4"G |



## OVERALL DIMENSIONS FIXED

| Mod.   | A   | B   | C   | D   | E   | F   | G   | H   |  |  |  |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|
| FX-400 | 158 | 120 | 168 | 192 | 95  | 450 | 400 | 435 | 12,50<19,50   | 0,046   | 1   |
| FX-460 | 158 | 120 | 168 | 192 | 95  | 480 | 460 | 500 | 16,50<23,00   | 0,060   | 1   |
| FX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<45,00   | 0,085   | 1   |

# STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 SWIVELLING FOR ANTIFREEZE – WINDSCREEN – ADBLUE 20 bar



Equipped with:

- Antistatic black rubber hoses EPDM
- Stainless steel connections AISI 316
- Stainless steel swivelling joint 90° AISI 316
- Viton seals

| Article      | Hose length  | Ø hose | Inlet-outlet    |
|--------------|--------------|--------|-----------------|
| 071-2209-400 | Without hose | -      | M1/2"G - M1/2"G |
| 071-2209-410 | 10 m         | 1/2"   | M1/2"G - M1/2"G |

**SX-400**



|              |              |      |                 |
|--------------|--------------|------|-----------------|
| 071-2309-400 | Without hose | -    | M1/2"G - M1/2"G |
| 071-2309-415 | 15 m         | 1/2" | M1/2"G - M1/2"G |

**SX-460**




|              |              |      |                 |
|--------------|--------------|------|-----------------|
| 071-2409-500 | Without hose | -    | F3/4"G - M3/4"G |
| 071-2409-510 | 10 m         | 3/4" | F3/4"G - M3/4"G |
| 071-2409-515 | 15 m         | 3/4" | F3/4"G - M3/4"G |

**SX-550**



## OVERALL DIMENSIONS SWIVELLING

| Mod.   | A   | B   | C   | D   | E   | F   | G   | H   |             |       |   |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|-------------|-------|---|
| SX-400 | 150 | 120 | 168 | 196 | 95  | 450 | 400 | 510 | 13,50<20,50 | 0,046 | 1 |
| SX-460 | 150 | 120 | 168 | 196 | 95  | 480 | 460 | 575 | 17,50<24,00 | 0,060 | 1 |
| SX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00<45,00 | 0,085 | 1 |

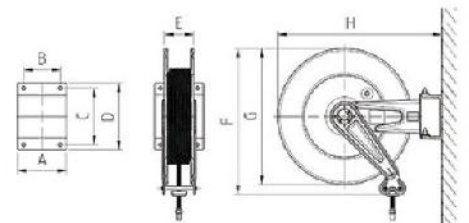

# STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 FIXED WITHOUT HOSE



**FX-400**

| Article      | Type of delivery fluid       | Swivelling joint 90° | Seals | Inlet-outlet    |
|--------------|------------------------------|----------------------|-------|-----------------|
| 070-2201-300 | Air-water 20 bar             | brass                | viton | F3/8"G - M3/8"G |
| 070-2201-400 | Air-water 20 bar             | brass                | viton | M1/2"G - M1/2"G |
| 070-2205-300 | Water 150°C 400 bar          | stainless steel      | viton | M3/8"G - M3/8"G |
| 070-2205-400 | Water 150°C 400 bar          | stainless steel      | viton | M1/2"G - M1/2"G |
| 070-2209-400 | Antifreeze-windscreen 20 bar | stainless steel      | viton | M1/2"G - M1/2"G |



**FX-460**

|              |                              |                 |       |                 |
|--------------|------------------------------|-----------------|-------|-----------------|
| 070-2301-400 | Air-water 20 bar             | Brass           | viton | M1/2"G - M1/2"G |
| 070-2305-300 | Water 150°C 400 bar          | stainless steel | viton | M3/8"G - M3/8"G |
| 070-2305-400 | Water 150°C 400 bar          | stainless steel | viton | M1/2"G - M1/2"G |
| 070-2309-400 | Antifreeze-windscreen 20 bar | stainless steel | viton | M1/2"G - M1/2"G |



**FX-550**

|              |                     |                  |       |                 |
|--------------|---------------------|------------------|-------|-----------------|
| 070-2401-400 | Air-water 20 bar    | brass            | viton | M1/2"G - M1/2"G |
| 070-2405-300 | Water 150°C 400 bar | stainless steel  | viton | M3/8"G - M3/8"G |
| 070-2405-400 | Water 150°C 400 bar | stainless steel  | viton | M1/2"G - M1/2"G |
| 070-2408-600 | Diesel 10 bar       | galvanized steel | viton | F1"G - M1"G     |
| 070-2409-500 | Adblue 20 bar       | stainless steel  | viton | F3/4"G - M3/4"G |



**FX-555**


|              |                     |                  |       |                 |
|--------------|---------------------|------------------|-------|-----------------|
| 070-2502-400 | Air-water 20 bar    | brass            | viton | M1/2"G - M1/2"G |
| 070-2502-600 | Air-water 20 bar    | brass            | viton | F1"G - M1"G     |
| 070-2505-300 | Water 150°C 400 bar | stainless steel  | viton | M3/8"G - M3/8"G |
| 070-2505-400 | Water 150°C 400 bar | stainless steel  | viton | M1/2"G - M1/2"G |
| 070-2508-600 | Diesel 10 bar       | galvanized steel | viton | F1"G - M1"G     |






**FX-560**

|              |                     |                  |       |                 |
|--------------|---------------------|------------------|-------|-----------------|
| 070-2602-600 | Air-water 20 bar    | brass            | viton | F1"G - M1"G     |
| 070-2605-400 | Water 150°C 400 bar | stainless steel  | viton | M1/2"G - M1/2"G |
| 070-2608-600 | Diesel 10 bar       | galvanized steel | viton | F1"G - M1"G     |
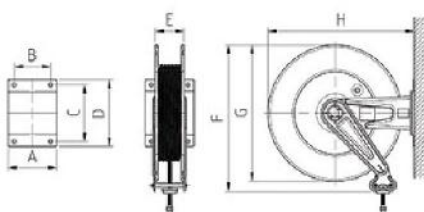
## OVERALL DIMENSIONS FIXED



| Mod.   | A   | B   | C   | D   | E   | F   | G   | H   |  |  |  |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|
| FX-400 | 158 | 120 | 168 | 192 | 95  | 450 | 400 | 435 | 12,50   | 0,046   | 1   |
| FX-460 | 158 | 120 | 168 | 192 | 95  | 480 | 460 | 500 | 16,50   | 0,060   | 1   |
| FX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00   | 0,085   | 1   |
| FX-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 600 | 26,00   | 0,100   | 1   |
| FX-560 | 440 | 390 | 225 | 270 | 360 | 590 | 550 | 600 | 33,00   | 0,180   | 1   |

# STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 SWIVELLING WITHOUT HOSE



| Article      | Type of delivery fluid       | Swivelling joint 90° | Seals | Inlet-outlet      |
|--------------|------------------------------|----------------------|-------|-------------------|
| 071-2201-300 | Air-water 20 bar             | brass                | viton | F3/8" G - M3/8" G |
| 071-2201-400 | Air-water 20 bar             | brass                | viton | M1/2" G - M1/2" G |
| 071-2205-300 | Water 150°C 400 bar          | stainless steel      | viton | M3/8" G - M3/8" G |
| 071-2205-400 | Water 150°C 400 bar          | stainless steel      | viton | M1/2" G - M1/2" G |
| 071-2209-400 | Antifreeze-windscreen 20 bar | stainless steel      | viton | M1/2" G - M1/2" G |

**SX-400**



|              |                              |                 |       |                   |
|--------------|------------------------------|-----------------|-------|-------------------|
| 071-2301-400 | Air-water 20 bar             | Brass           | viton | M1/2" G - M1/2" G |
| 071-2305-300 | Water 150°C 400 bar          | stainless steel | viton | M3/8" G - M3/8" G |
| 071-2305-400 | Water 150°C 400 bar          | stainless steel | viton | M1/2" G - M1/2" G |
| 071-2309-400 | Antifreeze-windscreen 20 bar | stainless steel | viton | M1/2" G - M1/2" G |

**SX-460**



|              |                     |                  |       |                   |
|--------------|---------------------|------------------|-------|-------------------|
| 071-2401-400 | Air-water 20 bar    | brass            | viton | M1/2" G - M1/2" G |
| 071-2405-300 | Water 150°C 400 bar | stainless steel  | viton | M3/8" G - M3/8" G |
| 071-2405-400 | Water 150°C 400 bar | stainless steel  | viton | M1/2" G - M1/2" G |
| 071-2408-600 | Diesel 10 bar       | galvanized steel | viton | F1" G - M1" G     |
| 071-2409-500 | Adblue 20 bar       | stainless steel  | viton | F3/4" G - M3/4" G |

**SX-550**



|              |                     |                  |       |                   |
|--------------|---------------------|------------------|-------|-------------------|
| 071-2502-400 | Air-water 20 bar    | brass            | viton | M1/2" G - M1/2" G |
| 071-2502-600 | Air-water 20 bar    | brass            | viton | F1" G - M1" G     |
| 071-2505-300 | Water 150°C 400 bar | stainless steel  | viton | M3/8" G - M3/8" G |
| 071-2505-400 | Water 150°C 400 bar | stainless steel  | viton | M1/2" G - M1/2" G |
| 071-2508-600 | Diesel 10 bar       | galvanized steel | viton | F1" G - M1" G     |

**SX-555**



## OVERALL DIMENSIONS SWIVELLING

| Mod.   | A   | B   | C   | D   | E   | F   | G   | H   | Kg    | m <sup>3</sup> | Nº |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|-------|----------------|----|
| SX-400 | 150 | 120 | 168 | 196 | 95  | 450 | 400 | 510 | 13,50 | 0,046          | 1  |
| SX-460 | 150 | 120 | 168 | 196 | 95  | 480 | 460 | 575 | 17,50 | 0,060          | 1  |
| SX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00 | 0,085          | 1  |
| SX-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 680 | 27,00 | 0,100          | 1  |

